


M50i

650
AIRWATTS

ASPIDECO CENTRE AGREE MVAC

Decibels	Décibels	Decibelios
58		
Air flow	Débit d'air	Caudal de aire
217 M3/h		
Water lift	Dépression	Depresión
139 in	3530 mm	
MAX amperes	Ampères MAX	Amps MAX
6.6 A		
Voltage	Tension	Voltaje
240 V		
Number of motors	Nombre de moteurs	Número de motores
1		
Turbines per motor	Turbines par moteur	Turbinas por motor
2		
Capacity Bag	Capacité Sac	Capacidad Bolsa
7 IMP gal	31.8 L	
Height	Hauteur	Altura
22.5 in	57.2 cm	
Diameter	Diamètre	Diámetro
14 in	35.6 cm	
Weight	Poids	Peso
22.2 lbs	10.1 kg	
Filtration	Filtration	Filtración
Bag	Sac	Bolsa

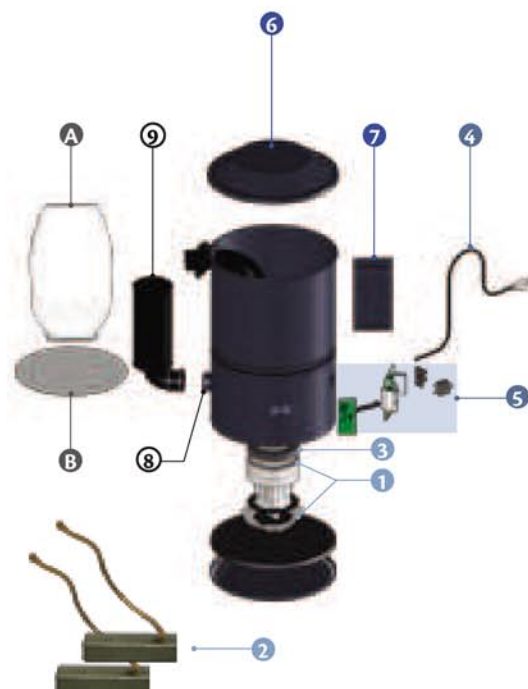

No.	Code	Description	Description	Descripción	Qty.
1	FM99980001	Complete motor	Moteur complet	Motor Completo	1
2	TMCARB16	Carbon brush	Brosse carbone	Cepillo de carbono	2
3	GASCUT20	Motor gasket	Joint moteur	Junta de motor	1
4	ELECOR03	Power cord	Cordon électrique	Cable eléctrico	1
5	ANNEX.	See Annex	Voir annexe	Ver anexo	1
6	FCOUV50CGK	Cover	Couvercle	Tapa	1
7	NSUPP02C	Wall bracket	Support mural	Soporte mural	1
8	REPINTKG	Air intake kit	Kit entrée d'air	Kit entrada de aire	1
9	TENSMUF7	Muffler (option)	Silencieux (option)	Silenciador (opción)	1

A	TDSACN92	Electrostatic bag	Sac électrostatique	Bolsa electrostática	1
B	TDFILTR9	Round filter	Filtre rond	Filtro redondo	1

A (3x) + B (1x)

TDSAC92N